

Electrical connections

Terminal 1: pulsed operation if connected to term. 3

Terminal 2: continuous operation if connected to term. 3

Terminal 3: regulated 12 VDC control output


Terminal 4: ballast / module ground

Terminal 5: + output to HID ballast # 1

Terminal 6: ballast / module ground

Terminal 7: + output to HID ballast # 2

**Terminal 8: 12 or 24 VDC power input, current rating:
20 A (12 VDC), 15 A (24 VDC) with dual 50 watt**

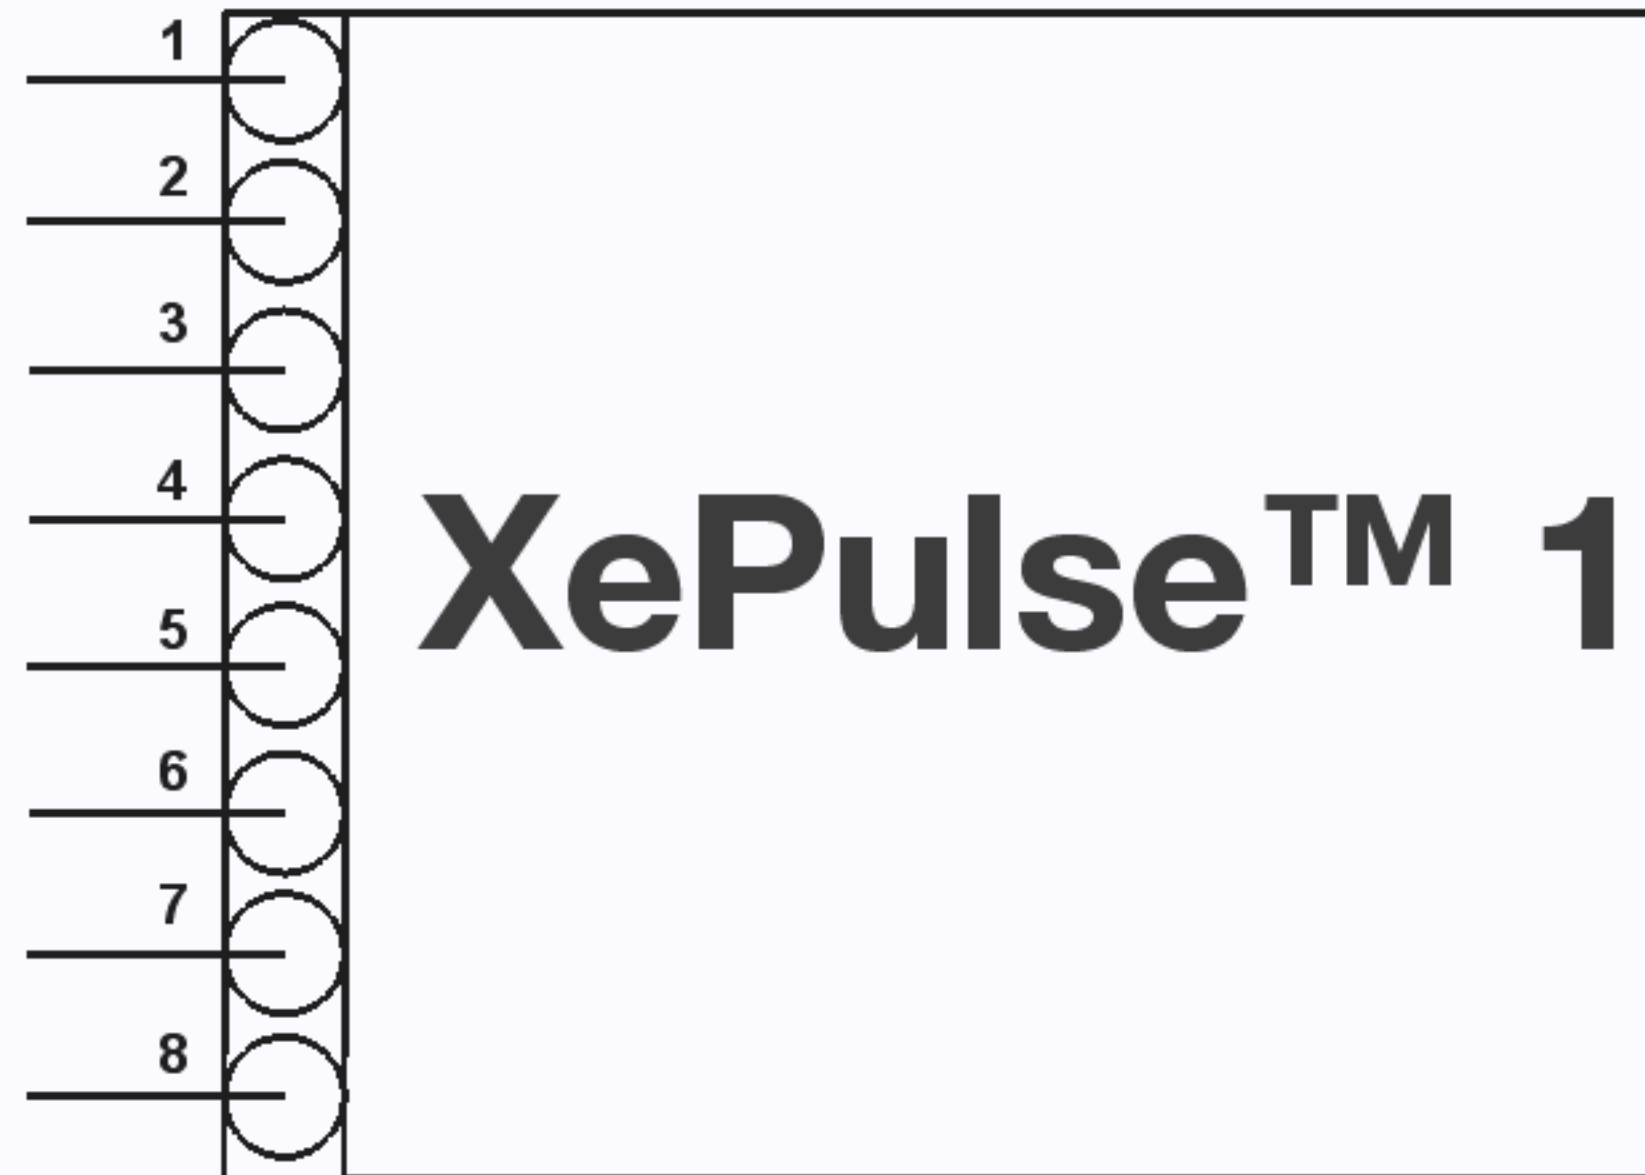

Notes:

case 1: For selecting Continuous or Pulsing mode, the internal circuit can be utilized, wired to an external 3-way low pwr switch

case 2: For selecting Continuous or Pulsing mode, a jumper between pin 1 and pin 3 automatically selects pulsing.

External wiring with a high pwr switch to the ballast is needed for continuous operation.